MASTER STROKE mss 3

AUDIOPHILE SERIES.HIGH END SQ MIDRANGE

STEG Italy

Specification		
Speaker Size		4.3 inch
Impedance	Z	4Ω
DC resistance	Re	3.6Ω
Voice coil dimension	∅	25.5mm
Voice coil inductance	Le	0.09 mH
Voice coil former/VCF		Kapton CCAW
Membrane material		Carbon fiber loaded with resin
Magnet system	Ms	Neodymium
Net weight	Lb	0.36kg
Transducer's suspension Qms	Qms	6.08
Transducer's suspension Qts	Qts	0.65
Motor strength	Bl	3.76
Centering device	Cd	Konex
Suspension cone	Sc	50sh rubber
Resonance frequency	Fs	97 Hz
Frequency response	Fr	100 Hz-12 kHz
Efficiency 1 W /1 m	SPL	86 dB
Power rating/Hi-pass 1500Hz	RMS	70W

Dimensions

All dimensions noted in mm

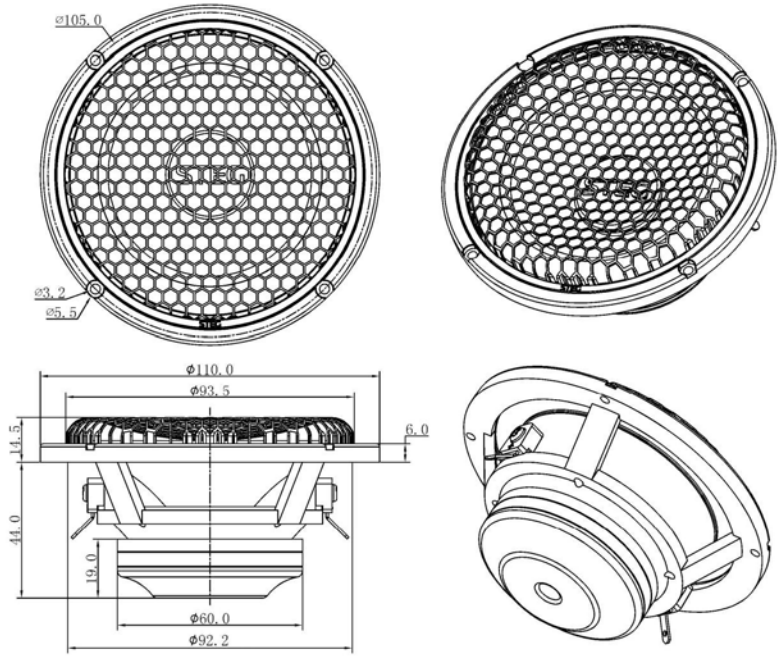

Recommended Frequency Cut:
high pass 100Hz minimum low pass up to 10k Hz
The cuts and slopes refer to these data according to the applied power and the position of the speaker, so we can not set a reliable standard.

Radiation mass load	Mms	4.74g
Force exerted suspension	Cms	568 umN
Volume air compressed	Vas	2.04 Ltr
Surface area cone	Sd	50 cm^2
Maximum Linear Excursion	Xmax	3 mm

I prodotti STEG (www.gt-trading.it) sono costruiti e distribuiti da G.T. Trading di Siliato Salvatore, Via Guazzi N°5/C – Tavernelle di Serrungarina 61035 (PU), tel. +39 0721 715289, fax +39 0721 715289, Web www.gt-trading.it email : info@gt-trading.it

GTtrading